

FERGUSON[®]
Bath, Kitchen & Lighting Gallery



Showroom Selections

NORTHERN PROPERTY MANAGEMENT
UNIT 2 - Specifications

Lindsay Vetter
22 National Drive
Franklin, MA 02038
(508) 553-6026
lindsay.vetter@ferguson.com

Table of Contents

Table of Contents	2
Kitchen	3
Thermador Freezerless Refrigerator T24IR800SP	3
Thermador Kick Plates & Trim TFL24IR800	6
Thermador Handles & Knobs PR36HNDL10	7
Thermador Upright Freezer T18IF800SP	8
Thermador Part & Accessory TFL18IR800	11
Thermador Handles & Knobs PR36HNDL10	12
Thermador Built-In Dishwasher DWHD440MFP	13
Thermador Wall Mount Range Hood HMCB42FS	15
Broan Miscellaneous Part BMD6TU	17
Thermador Gas Range PRG366GH	18
Sharp Microwave Drawer KB-6524PSY	23

T24IR800SP**24-INCH FLUSH CUSTOM FRESH FOOD COLUMN**

FREEDOM® COLLECTION, PANEL-READY

**FEATURES & BENEFITS**

- Freedom® Hinge enables true flush design
- Full-height door—true cabinet integration without exposed venting grille
- Brightspace interior design with All-LED sidewall and theater lighting
- FLEXTAMP® drawer providing the ultimate in preservation
- Accepts custom or stainless steel panels

TEMPERATURE RANGES

Refrigerator	35°F (2°C) to 46°F (8°C)
Temperature Controlled Drawer	Fish 32°F (0°C) Meat 35°F (1.5°C) Produce 37°F (3°C)
Deli Drawer	Just above 32°F (0°C)
SuperCool	35.5°F (2°C) for approximately 9 hours
Energy Saving (Economy) Mode	45°F (7°C)

ACCESSORIES (OPTIONAL)

Stainless Steel Panel Options:
TFL24IR800 - Flat Stainless Steel
TCH24IR800 - Chiseled Stainless Steel

Handle Options:
PR36HNDL10 - 36-Inch Professional
MS36HNDL10 - 36-Inch Masterpiece®

FRAMEKIT10 - Freedom® Frame Kit

HEATRKIT10 - Freedom® Heater Kit

GENERAL PROPERTIES

Panel Ready	Yes
Reversible Door Swing	Yes
Carbon Air Filter	Yes
Lighting	All-LED Sidewall and Theater Lighting
Full Width Shelves	4
Adjustable Shelves	3
Shelf Material	Glass w/Metal Trim
Full Extension Drawers at 90° Door Opening Angle	Yes
Temperature Controlled Drawer	Yes
Humidity Control Drawer	Yes
Door Bins	4
Gallon Door Bins	Yes
Door Open Alarm	Yes
Special Modes	Sabbath, Economy, Vacation

CAPACITY

Total Unit Gross Capacity (cu. ft.) - AHAM	13.2 cu. ft.
Refrigerator Gross Capacity (cu. ft.)	13.2 cu. ft.

PERFORMANCE

Dedicated Evaporator & Compressor System	Yes
Freeflow® Cold Air System	Yes
SuperCool	Yes

TECHNICAL DETAILS

Watts (W)	180 W
Current (A)	15 A
Volts (V)	120 V
Frequency (Hz)	60 Hz
Power Cord Length (in.)	78 3/4"
Plug Type	120V 3-Wire

DIMENSIONS & WEIGHT

Appliance Dimensions (H x W x D) (in.)	84" x 23 3/4" x 24"
Required Cutout Size (H x W x D) (in.)	84" x 24" x 24 3/4"
Net Weight (lbs)	309 lbs

EFFICIENCY

ENERGY STAR® Qualified	Yes
Annual Energy Consumption	283 kWh

WARRANTY

Limited, Entire Appliance, Parts and Labor on Any Part of the Refrigerator that Fails Because of a Manufacturing Defect	2 Year
Limited Warranty for Sealed Refrigeration System*; Parts and Labor	3rd to 6th Year
Limited Warranty for Sealed Refrigeration System*; Parts Only	7th to 12th Year

* Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and connection tubing

T24IR800SP


24-INCH FLUSH CUSTOM FRESH FOOD COLUMN

FREEDOM® COLLECTION, PANEL-READY




CUTOUT DIMENSIONS


Furniture return

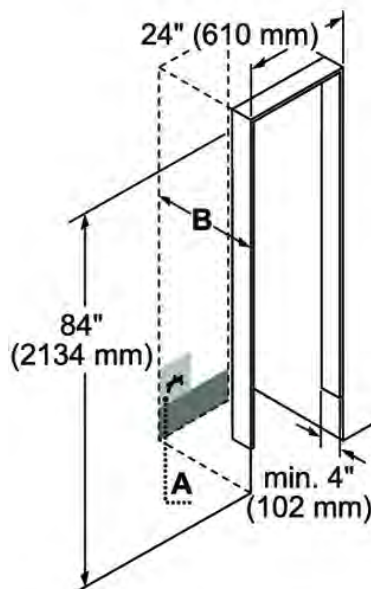

A: Area for installation of power connection.
B: Niche depth depends on kitchen design. For a flush installation, the depth needs to be at least 24 inches plus the thickness of the door panel. Panel dimensions based on a standard $\frac{1}{8}$ " inch reveal and 4 inch toe kick. Custom panel dimensions may vary depending on kitchen reveals and toe kick. Stainless Steel models contain a panel-ready base unit, ready-to-install Stainless Steel door(s) with a right or left door swing and handle(s).

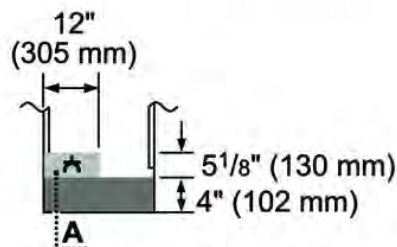


TOP VIEW CLEARANCE

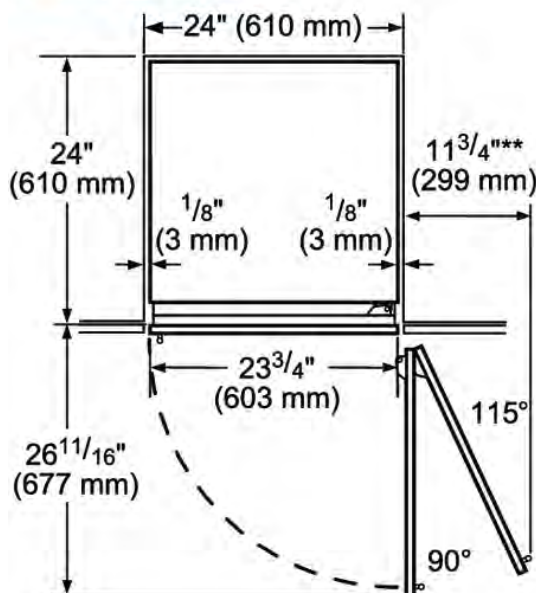

** Door handle must be added to this dimension

* Depends on the thickness of the furniture door. $\frac{3}{4}$ " (19 mm) is relevant for the stainless steel door. (special Accessory).

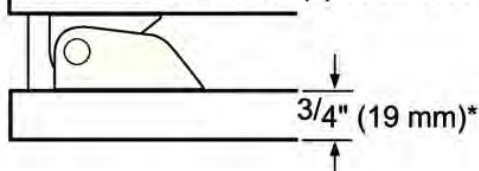


T24IR800SP

24-INCH FLUSH CUSTOM FRESH FOOD COLUMN

FREEDOM® COLLECTION, PANEL-READY



PANEL DIMENSIONS

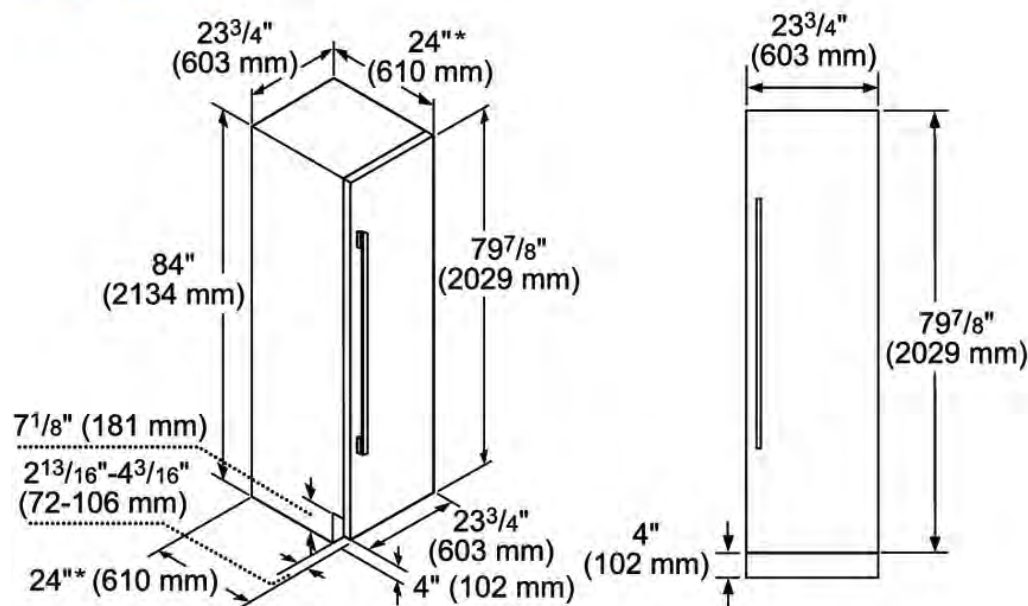

*Excludes thickness of door panel. If standard panel with $\frac{3}{4}"$ thickness is mounted, total depth is $24\frac{3}{4}"$.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2015 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

04 / 15

Product Details and Dimensions

Thermador

Thermador TFL24IR800 Kick Plates & Trim



Details and Dimensions

Additional Information	24" Flush Panel HANDLE SOLD SEPARATELY
Fits These Models	T24IR800SP & T24IF800SP

Disclaimer -- This is not an actual Manufacturer's Specification Sheet. The details and dimensions listed are accurate to the best of our knowledge at the time this document was produced. For an official specification sheet, please contact the manufacturer directly.

Product Details and Dimensions



Thermador PR36HNDL10
"Professional Series"
Handles & Knobs



Details and Dimensions	
Additional Information	36" Handle
Fits These Models	T24IR800SP & T30IR800SP & T18ID800RP & T18ID800LP & T18IF800SP & T24ID800RP & T24ID800LP & T24IF800SP & T30IF800SP & T36IB800SP & T36IT800NP & T18IW800SP & T24IW800SP

Disclaimer -- This is not an actual Manufacturer's Specification Sheet. The details and dimensions listed are accurate to the best of our knowledge at the time this document was produced. For an official specification sheet, please contact the manufacturer directly.

T18IF800SP

18-INCH FLUSH FREEZER COLUMN WITH INTERNAL ICE MAKER

FREEDOM® COLLECTION, PANEL-READY, REVERSIBLE DOOR SWING



GENERAL PROPERTIES	
Panel Ready	Yes
Reversible Door Swing	Yes
Lighting	All-LED Sidewall and Theater Lighting
Full Width Shelves	3
Adjustable Shelves	3
Shelf Material	Metal
Full Extension Drawers at 90° Door Opening Angle	Yes
Door Bins	5
Ice Maker	Yes
Door Open Alarm	Yes
Special Modes	Sabbath, Economy, Vacation

CAPACITY	
Total Unit Gross Capacity (cu. ft.) - AHAM	8.6 cu. ft.
Freezer Gross Capacity (cu. ft.)	8.6 cu. ft.

PERFORMANCE	
Dedicated Evaporator & Compressor System	Yes
SuperFreeze®	Yes
Defrost Process	Frost-Free

TECHNICAL DETAILS	
Watts (W)	367 W
Current (A)	15 A
Volts (V), Frequency (Hz)	120 V, 60 Hz
Power Cord Length (in.)	78 3/4"
Plug Type	120V-3 Prong

DIMENSIONS & WEIGHT	
Appliance Dimensions (H x W x D) (in.)	84" x 17 3/4" x 24"
Required Cutout Size (H x W x D) (in.)	84" x 18" x 24 3/4"
Net Weight (lbs)	261 lbs

EFFICIENCY	
ENERGY STAR® Qualified	Yes
Annual Energy Consumption	443 kWh

WARRANTY	
Limited, Entire Appliance, Parts and Labor on Any Part of the Refrigerator that Fails Because of a Manufacturing Defect	2 Year
Limited Warranty for Sealed Refrigeration System*; Parts And Labor	3rd to 6th Year
Limited Warranty for Sealed Refrigeration System*; Parts Only	7th to 12th Year

* Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and connection tubing

FEATURES & BENEFITS

- Freedom® Hinge enables true flush design
- Full-height door-true cabinet integration without exposed venting grille
- All-LED sidewall and theater lighting
- Brightspace interior design
- Accepts custom or stainless steel panels

TEMPERATURE RANGES

Freezer	-9°F (-23°C) to 7°F (-14°C)
SuperFreeze®	-9°F (-23°C) for approximately 52 hours
Energy Saving (Economy) Mode	3°F (-16°C)

ACCESSORIES (OPTIONAL)

Stainless Steel Panel Options:
TFL18IR800 - Flat Stainless Steel Panel
TCH18IR800 - Chiseled Stainless Steel Panel

Handle Options:
PR36HNDL10 - 36-Inch Professional
MS36HNDL10 - 36-Inch Masterpiece®

FRAMEKIT10 - Freedom® Frame Kit

HEATRKIT10 - Freedom® Heater Kit

Filters:
REPLFLTR10 - Freedom® Water Filter
SCRNFLTR10 - Filter By-Pass


T18IF800SP

18-INCH FLUSH FREEZER COLUMN WITH INTERNAL ICE MAKER


FREEDOM® COLLECTION, PANEL-READY, REVERSIBLE DOOR SWING



CUTOUT DIMENSIONS

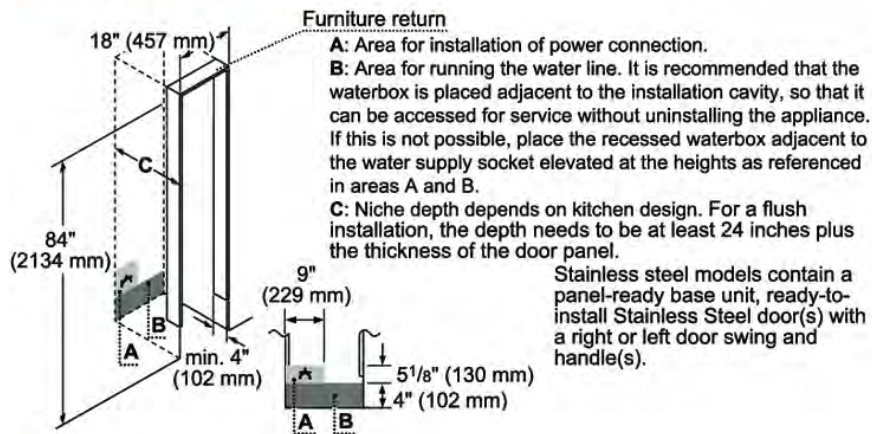

TOP VIEW CLEARANCE

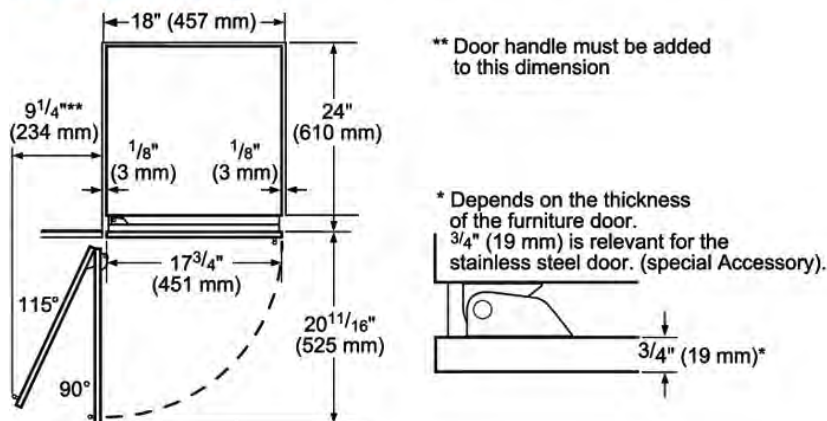


T18IF800SP

18-INCH FLUSH FREEZER COLUMN WITH INTERNAL ICE MAKER

FREEDOM® COLLECTION, PANEL-READY, REVERSIBLE DOOR SWING



PANEL DIMENSIONS

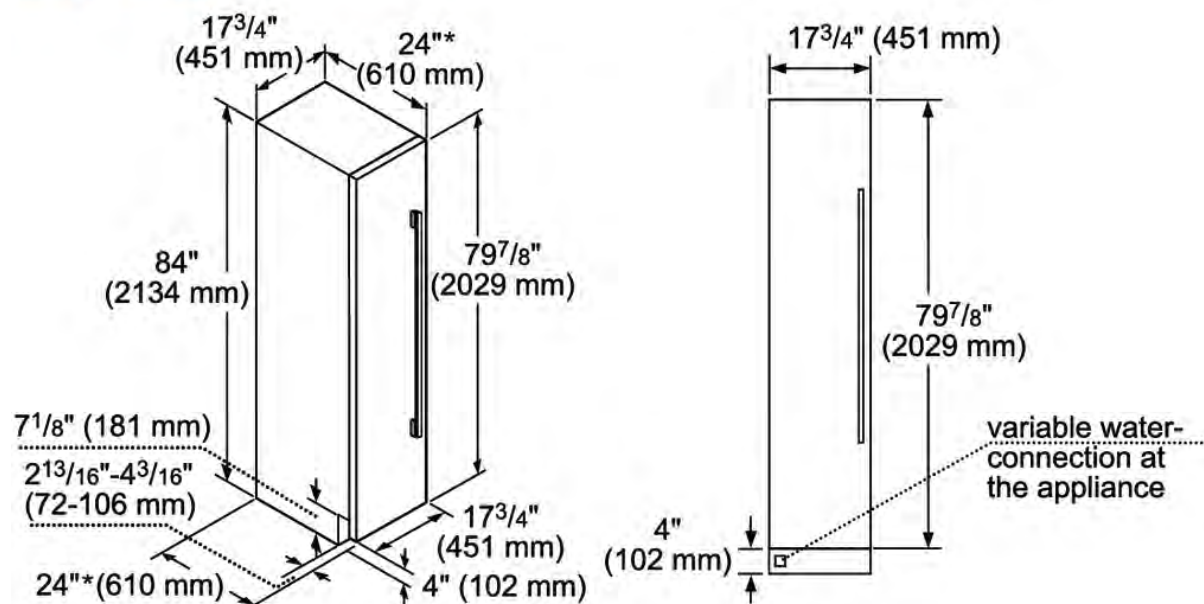

*Excludes thickness of door panel. If standard panel with $\frac{3}{4}"$ thickness is mounted, total depth is $24\frac{3}{4}"$.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2015 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

04 / 15

Product Details and Dimensions

Thermador

Thermador TFL18IR800 Part & Accessory



Details and Dimensions

Additional Information	18" Flush Panel
Fits These Models	T18IF800SP

Disclaimer -- This is not an actual Manufacturer's Specification Sheet. The details and dimensions listed are accurate to the best of our knowledge at the time this document was produced. For an official specification sheet, please contact the manufacturer directly.

Product Details and Dimensions

Thermador

Thermador PR36HNDL10 "Professional Series" Handles & Knobs



Details and Dimensions

Additional Information	36" Handle
Fits These Models	T24IR800SP & T30IR800SP & T18ID800RP & T18ID800LP & T18IF800SP & T24ID800RP & T24ID800LP & T24IF800SP & T30IF800SP & T36IB800SP & T36IT800NP & T18IW800SP & T24IW800SP

Disclaimer -- This is not an actual Manufacturer's Specification Sheet. The details and dimensions listed are accurate to the best of our knowledge at the time this document was produced. For an official specification sheet, please contact the manufacturer directly.

DWHD440MFP

EMERALD® 4-PROGRAM DISHWASHER

PROFESSIONAL SERIES HANDLE



Also Available In:

DWHD440MFM - Flat Stainless Steel Panel
with Masterpiece® Series Handle
DWHD440MPR - Custom Panel

FEATURES & BENEFITS

- Sens-A-Wash® measures water cleanliness and adjusts wash cycle
- Three stage advanced filtration recirculates water for sparkling results
- Accommodates 15 plate settings for your dinner parties
- Extra Dry Option ensures perfectly dry dishes and sanitizes 99.9% of bacteria
- Impressively Quiet®-48 dBA for peaceful kitchen experience

ACCESSORIES (OPTIONAL)

Dishwasher Supply and Drainage Hose Extension 76 3/4"	SGZ1010UC
Dishwasher 3-Prong Power Cord 66 7/8"	SMZPC002UC
Dishwasher Accessory Kit	SMZ5000
Fine Silverware Carafe	SMZ5002UC



Accessory Kit includes Extra-Tall-Item Sprinkler, Vase / Bottle Holder, 3 Plastic Item Clips and Small Item Basket



Fine Silverware Carafe

GENERAL PROPERTIES

Number Of Wash Cycles	4
Number Of Options	4
dBA	48
Third Rack	N/A
Rack Adjustability	Rackmatic 3-Stage
Tub Material	Stainless Steel
Control Type	Buttons
Concealed Heating Element	Yes
Leak Protection System	N/A
Water Softener	No
Five-Level Wash	Yes
Childlock	No

EFFICIENCY

Water Usage Per Cycle (g)	2.9 g
Energy Efficiency Class	Tier 1
ENERGY STAR® Qualified	Yes
Total Annual Energy Consumption (kWh)	269 kWh
Total Annual Water Consumption (g)	624 g

CAPACITY

Number Of Place Settings	15
--------------------------	----

TECHNICAL DETAILS

Watts (W)	1,300 W
Current (A)	12 A
Volts (V)	120 V
Frequency (Hz)	60 Hz
Power Cord Length (in)	47 1/4"
Minimum Water Pressure (lb/sin)	14
Max. Temperature for Water Intake	120° F
Length Inlet Hose (in)	53"
Length Outlet Hose (in)	67"

DIMENSIONS & WEIGHT

Overall Appliance Dimensions (HxWxD) (in)	33 7/8" x 23 9/16" x 23 3/4"
Required Cutout Size (HxWxD) (in)	33 7/8" x 23 5/8" x 24"
Adjustable Feet	Yes
Net Weight (lbs)	86 lbs


WARRANTY

Full Warranty, Entire Appliance, Parts and Labor	2 Year
Limited Warranty for Microprocessor or Printed Circuit Board; Parts Only	3rd to 5th Year
Limited Warranty for Racks (Does Not Include Rack Components); Parts Only	3rd to 5th Year
Limited Warranty for Rust-through On Inner Tub Liner; Parts Only	Lifetime

DWHD440MFP EMERALD® 4-PROGRAM DISHWASHER PROFESSIONAL SERIES HANDLE



DISHWASHER & CUTOUT DIMENSIONS

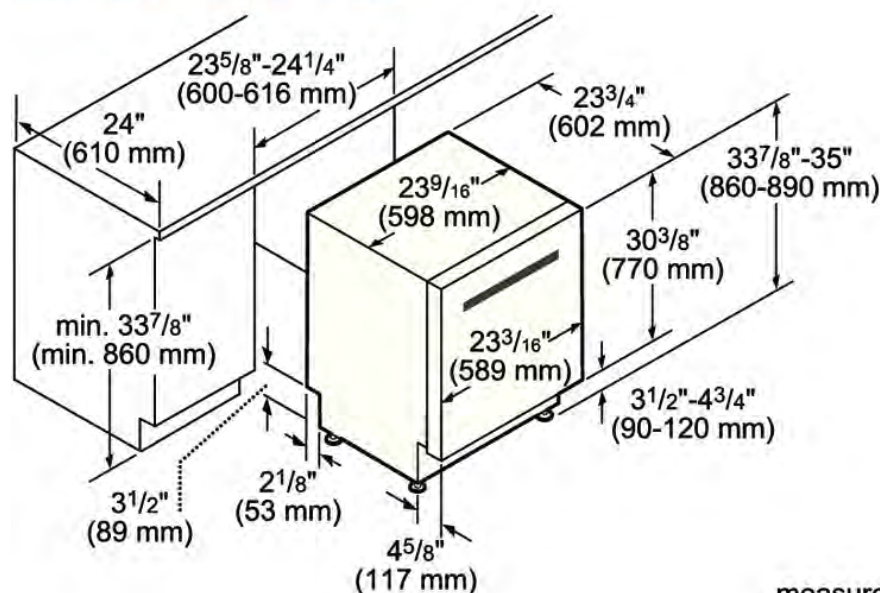

measurements in inches and mm

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2015 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

HMCB42FS

42-INCH CHIMNEY WALL HOOD WITH BLOWER

MASTERPIECE® SERIES



FEATURES & BENEFITS

- 600 CFM Integrated Blower included
- Three fan speeds plus 10 minute high-power operation mode
- Dishwasher-safe stainless-frame mesh filters
- Filter systems are highly efficient at capturing grease
- Powerfully Quiet® ventilation systems

ACCESSORIES (OPTIONAL)

Stainless Steel Chimney Hood Extension - CHIMXHMC

For up to 11-foot ceiling applications. Extension replaces upper section of standard chimney extension. May require fabrication to reduce height.

GENERAL PROPERTIES

Operating Mode	Ducted
Maximum CFM	600 CFM
Sones	N/A
Number of Speed Settings	3-Stage
Motor Location	Integrated Motor In Hood Body
Number of Lights	3
Bulb Type	Halogen
Total Power of the Lamps (W)	20 W
Damper Included	Yes
Grease Filter Material	Washable Synthetic
Grease Filter Type	Multilayer Cassette

TECHNICAL DETAILS

Watts (W)	590 W
Current (A)	15 A
Volts (V)	110 V
Frequency (Hz)	60 Hz
Plug Type	120V-3 Prong
Conduit Length	51"

DIMENSIONS & WEIGHT

Overall Appliance Dimensions (Width of Canopy Included) (HxWxD) (in)	31" - 35" / x 41 1/2" x 21 1/2"
Height of The Chimney (in)	21 1/2" - 25 1/2"
Required Distance Above Cooktop / Range Cooking Surface	30" / 30"
Diameter of Air Duct (in) Top	6"
Net Weight (lbs)	57 lbs

BLOWER OPTIONS

Remote Blower (Mounted to Roof or External Wall)	N/A
	N/A
	N/A
Inline Blower (Mounted Between Kitchen and External Wall)	N/A
	N/A
Integrated Blower (Mounted in Hood)	N/A


WARRANTY

Limited Warranty Parts and Labor	2 Year
----------------------------------	--------


HMCB42FS 42-INCH CHIMNEY WALL HOOD WITH BLOWER MASTERPIECE® SERIES



HOOD DIMENSIONS

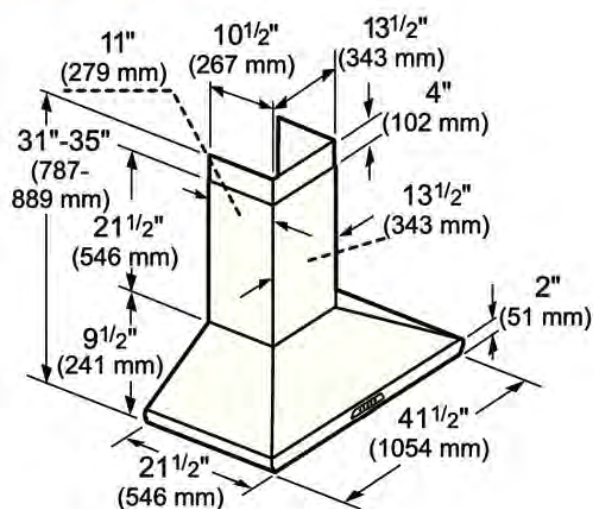

measurements in inches and mm

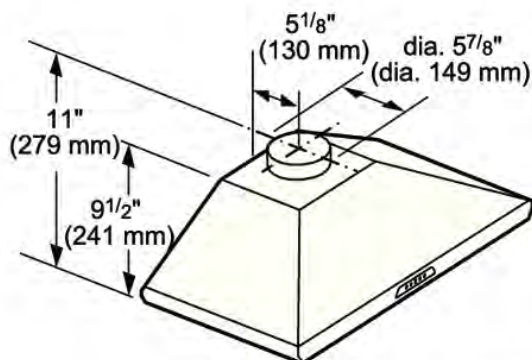


measurements in inches and mm

OPTIONAL ACCESSORIES

CHIMNEY EXTENSION CHIMXHMC

Stainless steel chimney hood extension for up to 11-foot ceiling applications. Extension replaces upper section of standard chimney extension. May require fabrication to reduce height.

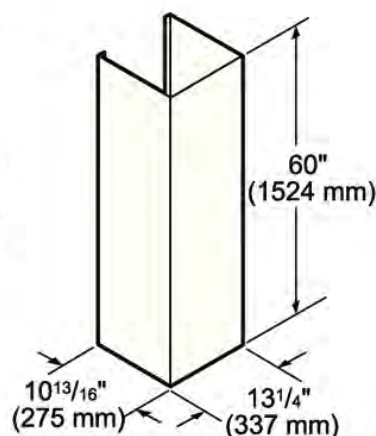

measurements in inches and mm

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2015 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

Product Details and Dimensions



Broan BMD6TU
Miscellaneous Part



Details and Dimensions

Construction	Steel
Additional Information	6" Universal Automatic Make-Up Air Damper with Pressure Sensor Kit
Gauge	24
Includes	24 Volt 20VA Transformer, Pressure Switch Kit

Disclaimer -- This is not an actual Manufacturer's Specification Sheet. The details and dimensions listed are accurate to the best of our knowledge at the time this document was produced. For an official specification sheet, please contact the manufacturer directly.

PRG366GH 36-INCH GAS PRO HARMONY® RANGE PROFESSIONAL SERIES, STANDARD-DEPTH, PORCELAIN COOKTOP SURFACE



Also Available:
PRL366GH - LP

FEATURES & BENEFITS

- ★ - Exclusive, patented Star® Burner—most even heating, unsurpassed flame coverage
- ★ - QuickClean Base® designed for easy surface cleaning
- ★ - Precision simmering capabilities as low as 100°F (375 BTU) with 2 ExtraLow® Simmer burners
 - Professional style, continuous cast iron grates
 - Truly Flush Mounted™, 24" standard cabinet depth

TECHNICAL DETAILS

Circuit Breaker (A)	15 A
Volts (V)	120 V
Frequency (Hz)	60 Hz
Plug Type	120V-3 Prong
Power Cord Length (in)	72"
Energy Source	Gas
Gas Type	Natural Gas 15 mbar (USA)
Alternative Gas Type	Liquid Gas 27.5 mbar (USA)

GENERAL PROPERTIES

Oven Capacity	5.0 cu. ft.
Cooking Modes - Main / Large Cavity	Bake, Convection Bake, Broil, Extended Bake
Cooking Modes - Small Cavity	N/A
Programs	Sabbath Function
Cleaning Type	N/A
Type of Grate	Continuous Cast Iron
Controls	Metal Knobs
Sealed Burners	Yes

OVEN PERFORMANCE

Bake Power	27,000 BTU (NG)
Broil Power	20,000 BTU (NG)
Convection Power	N/A

BURNER PERFORMANCE

Total Number of Cooktop Burners	6
Power of Front Left Burner BTU	18,000 and XLO (NG)
Power of Back Left Burner BTU	18,000 and XLO (NG)
Power of Back Center Burner BTU	18,000 (NG)
Power of Front Center Burner BTU	18,000 (NG)
Power of Center 12" Electric Griddle (W)	N/A
Power of Center 12" Electric Grill (W)	N/A
Power of Far Right 12" Electric Griddle (W)	N/A
Power of Back Right Burner BTU	18,000 (NG)
Power of Front Right Burner BTU	18,000 (NG)

DIMENSIONS & WEIGHT

Overall Appliance Dimensions (HxWxD) (in)	35 7/8"–36 3/4" x 35 15/16" x 24 3/4"
Required Cutout Size (HxWxD) (in)	35 7/8"–36 3/4" x 36" x 24"
Adjustable Range Height (in.)	7/8"
Net Weight (lbs)	419 lbs

ACCESSORIES (INCLUDED)

1 X Island Trim, 3 X Full Access Telescopic Racks, 1 X Broiler Pan

WARRANTY

Limited Warranty, Entire Appliance, Parts and Labor	2 Year
---	--------

SEE PAGE 2 FOR OPTIONAL ACCESSORIES

★ THERMADOR EXCLUSIVE

PRG366GH 36-INCH GAS PRO HARMONY® RANGE PROFESSIONAL SERIES, STANDARD-DEPTH, PORCELAIN COOKTOP SURFACE



ACCESSORIES (OPTIONAL)



PA12CHPBLK
12" Cutting Board



PWOKRINGHC
Wok Ring



PA36GLBH
9" Low Backguard




PAKNOBLUNH
Blue Knob Pro Harmony Kit




PAGRIDDLE
Griddle

36-INCH RANGE DIMENSIONS

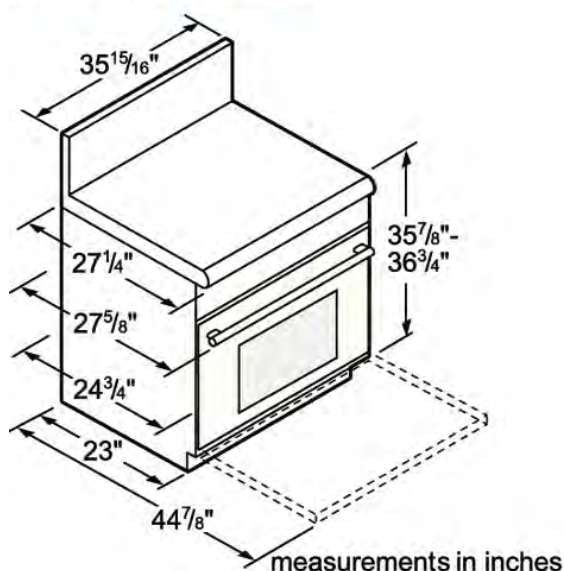

36-INCH RANGE CUTOUT DIMENSIONS

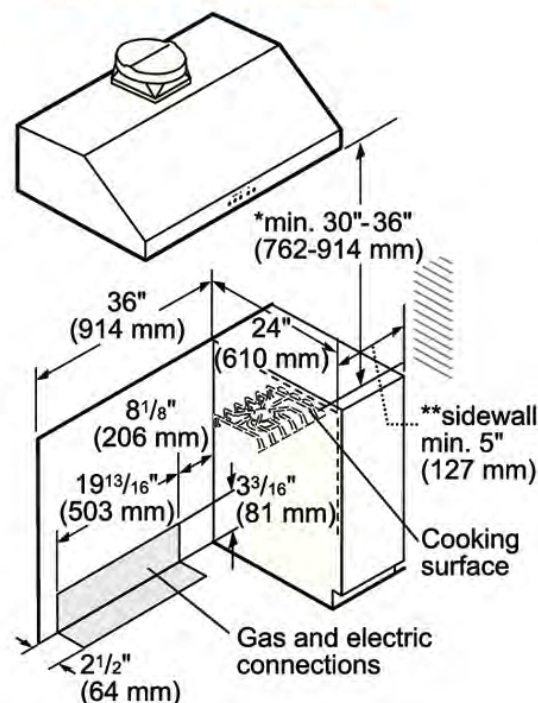

* 30" (762 mm) minimum clearance above cooking surface to non-combustible surface. Minimum clearance above cooking surface to combustible surface is 36" (914 mm).

** 5" (127 mm) minimum clearance from sides of the range, above the cooking surface, to combustible side walls.


Note: Most hoods contain combustible components that must be considered when planning the installation.

measurements in inches

PRG366GH
36-INCH GAS PRO HARMONY® RANGE
 PROFESSIONAL SERIES, STANDARD-DEPTH, PORCELAIN COOKTOP SURFACE



36-INCH RANGE CUTOUT DIMENSIONS

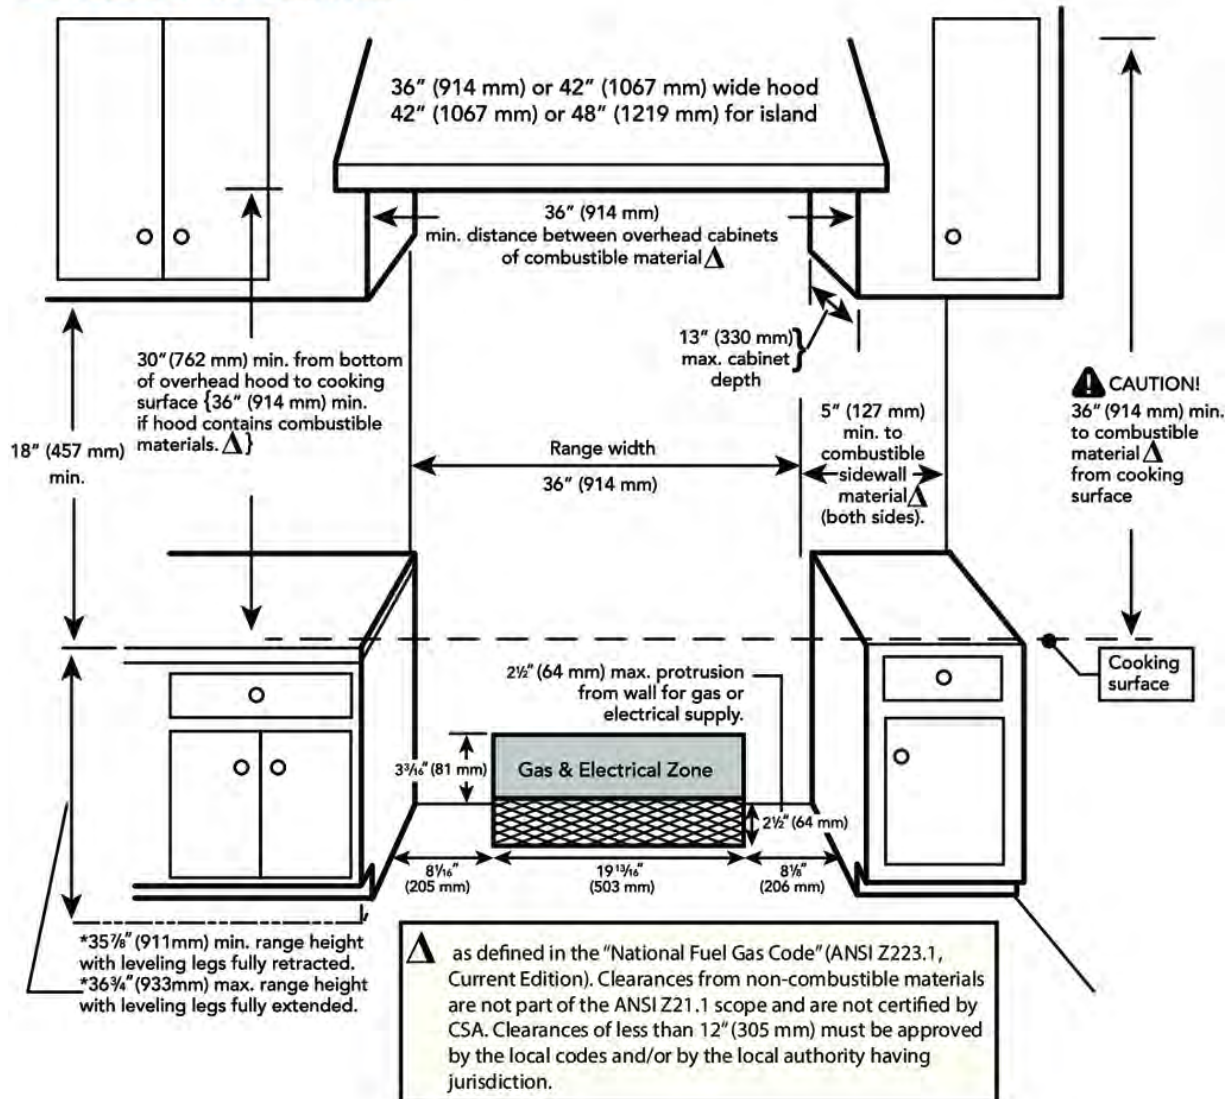

PRG366GH


36-INCH GAS PRO HARMONY® RANGE

PROFESSIONAL SERIES, STANDARD-DEPTH, PORCELAIN COOKTOP SURFACE



36-INCH RANGE DIMENSIONS AND CLEARANCE REQUIREMENTS WITH "LOW BACK"

NOTE: A 36-inch minimum clearance is required between the top of the cooking surface and the bottom of an unprotected cabinet. A 30-inch clearance can be used when the bottom of the wood or metal cabinet is protected by not less than 1/4 inch of a flame retardant material covered with not less than No. 28 MSG sheet steel, 0.015 inch (0.4 mm) thick stainless steel, 0.024 inch (0.6 mm) aluminum, or 0.020 inch (0.5 mm) thick copper.

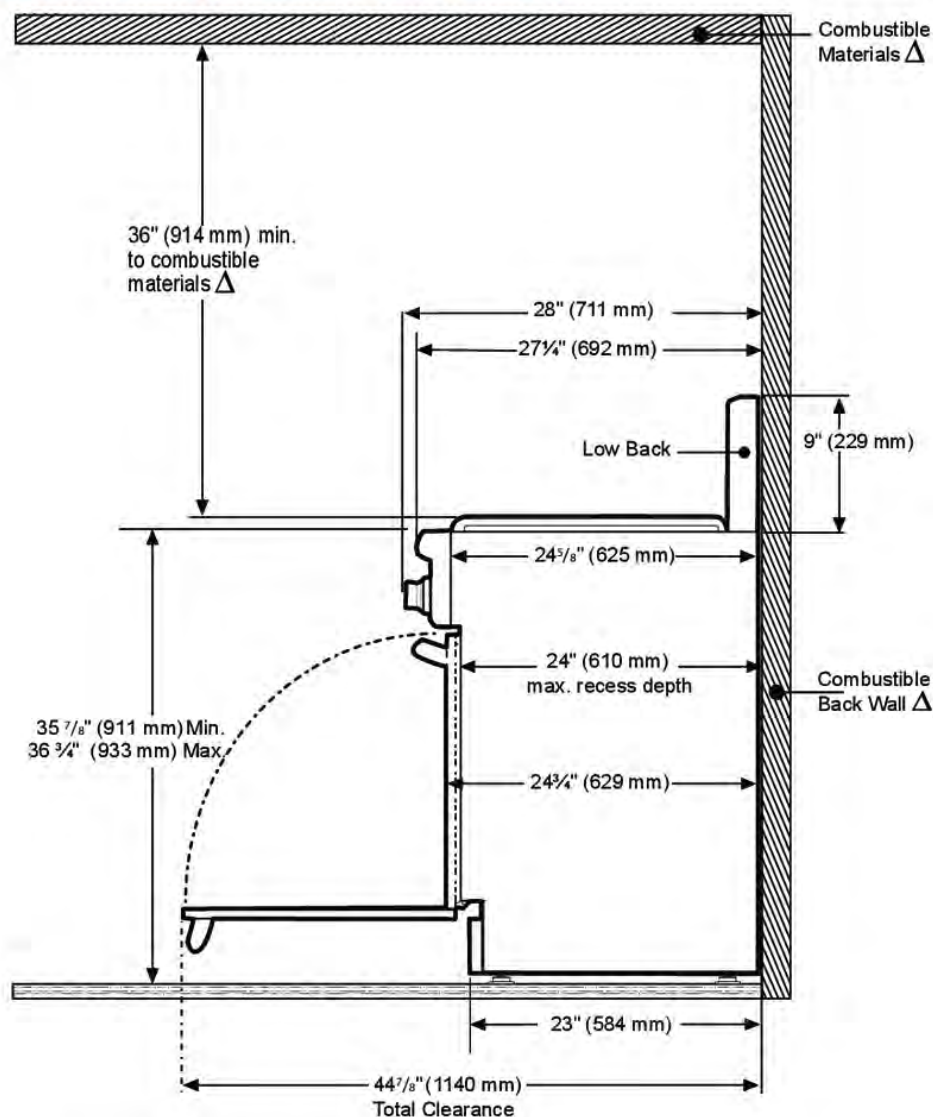


△ As defined in the "National Fuel Gas Code" (ANSI Z223.1, Current Edition). Clearances from non-combustible materials are not part of the ANSI Z21.1 scope and are not certified by CSA. Clearances of less than 12" (305 mm) must be approved by the local codes and/or by the local authority having jurisdiction.

PRG366GH 36-INCH GAS PRO HARMONY® RANGE PROFESSIONAL SERIES, STANDARD-DEPTH, PORCELAIN COOKTOP SURFACE



36-INCH RANGE DIMENSIONS AND CLEARANCE REQUIREMENTS WITH "FLUSH ISLAND TRIM"

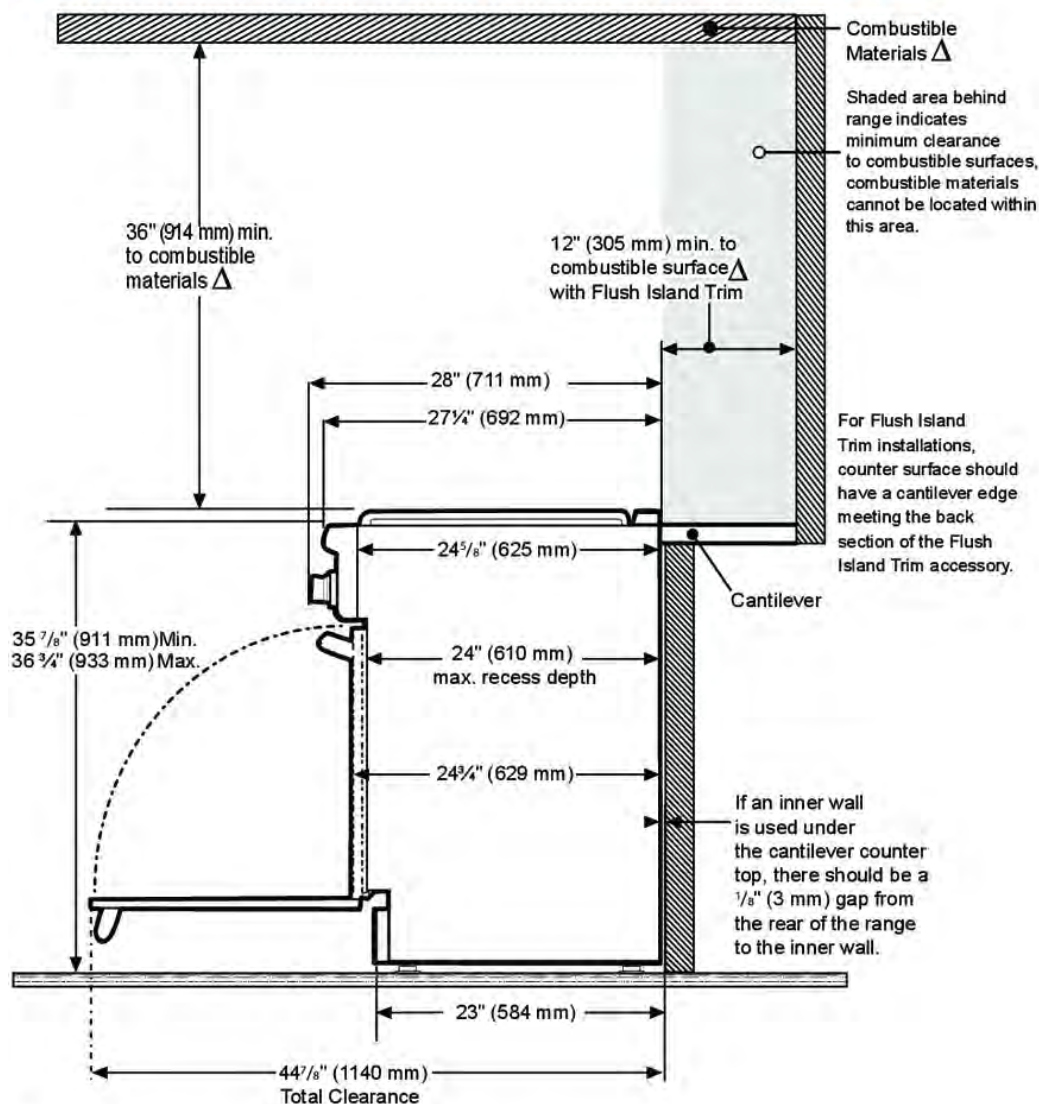

△ As defined in the "National Fuel Gas Code" (ANSI Z223.1, Current Edition). Clearances from non-combustible materials are not part of the ANSI Z21.1 scope and are not certified by CSA. Clearances of less than 12" (305 mm) must be approved by the local codes and/or by the local authority having jurisdiction.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2015 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

SHARP®

Carousel®

Microwave Oven Drawer

KB-6524PS

AUTO-TOUCH™ CONTROL

EASIER COOKING AND CLEANUP

LOW-PROFILE DESIGN

STAINLESS-STEEL FINISH

FITS 4 QT. CASSEROLE DISH

TALL ENOUGH FOR A 20-OZ. TALL COFFEE CUP

**1000
WATTS**

**1.2
CU.FT.**



CONVENIENCE YOU CAN COUNT ON.

Innovative thinking led to the world's first Microwave Drawer™ Oven, an appliance that has helped revolutionize kitchen design and microwave oven placement. Now Sharp introduces the next generation of this successful appliance – larger, sleeker and more accessible than ever. The new KB-6524PS series fits in the same space as other Sharp 24-inch models, yet it's larger 1.2 cubic feet interior is tall enough to hold a 20 oz. cup from your favorite take-out coffee store. Plus, there are two convenient ways to open or close the drawer – either pull or push the Easy Open handle or simply touch the Auto-Touch™ control panel. With more convenience features, quieter operation and a more integrated design, the KB-6524PS series really is the best solution yet for where to place the microwave.

SPECIFICATIONS

FEATURES

Size:	24"
Built-in Ready:	Yes. Can be installed below any electric or gas wall oven.
Front-mounted touch controls:	Yes. Angled for easy viewing.
Drawer opening system:	Easy Open + Touch Control
Digital LCD Display:	Yes
Wattage:	1000 Watts
Color:	Stainless Steel
Microwave Keep Warm:	Yes, up to 30 minutes
Kitchen timer:	Yes
Control lock:	Yes
Demonstration mode:	Yes
Capacity:	1.2 cu. ft. capacity (holds 9" x 13" dish)*
Sensor Cook®, Reheat, Popcorn:	11 Settings
Beverage Center:	Yes
Preprogrammed Reheat:	2 Settings
Automatic Defrost:	6 Settings
Variable power levels:	11
Programmable stages:	4
Clock :	Yes
Minute Plus™:	Yes
Melt and Soften Buttons:	Yes

DIMENSIONS & WEIGHT (in./lbs.)

Product Dimensions (w x h x d):	23.88" x 15.88" x 26.19"
Product Weight (lbs):	74
Shipping Dimensions (w x h x d):	29.8" x 21.9" x 27.9"
Shipping Weight (lbs):	85.8

ADDITIONAL SPECIFICATIONS

Power Ratings:	120V, 60Hz / 1.67kW, 14.5 Amps
Safety Compliance:	FCC, DHS, UL listed

WARRANTY/UPC

Parts:	1 year limited
Labor:	1 year limited
Magnetron Tube:	Additional 4 years (part only)
UPC:	074000618657

*Internal capacity calculated by measuring maximum width, depth and height. Actual capacity for holding food is less.

© 2017 Sharp Electronics Corporation. All rights reserved.
Sharp, Carousel and all related trademarks are trademarks or registered trademarks of Sharp Corporation and/or its affiliated companies. All other trademarks are property of their respective owners.
Product specifications and design are subject to change without notice.

SHARP ELECTRONICS CORPORATION
100 Paragon Drive, #100, Montvale NJ, 07645
1.800.BE.SHARP • www.sharpsusa.com

9-22-2017 v2